


Standard Rotary Cylinder 13.7MPa (140kgf/Cm²)

Model Number

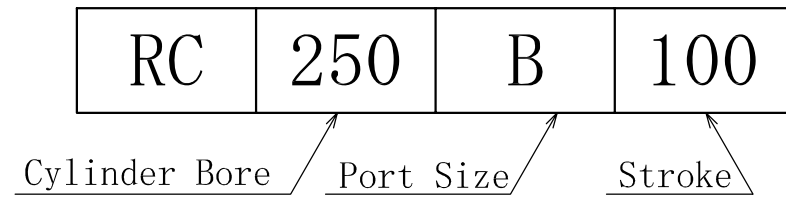

Port sizes

(When ordering, please also specify the maximum rotation speed.)

A	→ 1/2"
B	→ 3/4"
B II	→ 1"
C	→ 1·1/4"

* We can also fill orders for sizes larger than these.

Dimension Table

Model No.	Cyl. Bore A	B	C	D	E	F	G	H	X
RC-125	125	70	M40xP1.5	190	230	260	25	8-φ 18	185
RC-150	150	80	M50xP1.5	215	265	305	25	8-φ 22	176
RC-180	180	90	M50xP2	255	305	345	30	12-φ 22	194
RC-200	200	90	M60xP2	280	340	395	30	8-φ 30	196
RC-230	230	100	M70xP2	310	370	425	30	12-φ 30	212
RC-250	250	100	M70xP2	330	390	445	35	12-φ 30	230
RC-280	280	110	M75xP2	360	430	490	35	12-φ 33	240
RC-300	300	110	M75xP2	400	470	530	40	16-φ 33	260
RC-330	330	120	M80xP2	430	510	580	40	12-φ 39	270
RC-350	350	120	M80xP2	460	540	610	45	16-φ 39	280
RC-400	400	150	M100xP2	510	590	660	50	16-φ 39	304

※ We can manufacture up to 400 mm Cylinder.

